

# MONACO COMPONENTS, INC.


## BUILT-IN DRIVE STYLE PANEL MOUNTING

# 1000 series


- Use a 4.5 mm tapping screw with washer to mount to panel.
- Variety of voltage ranges and tone types available.
- Available with pins or leadwires.

MODEL	MPF-1446	MPF-1448	MPF-1450	MPF-1452	MPF-1447	MPF-1449	MPF-1451	MPF-1453
FREQUENCY *	2900 HZ ± 500 Hz							
DRIVING CIRCUIT	BUILT IN							
OPERATING VOLTAGE	1 - 13 V			1 - 28 V	1 - 13 V			1 - 28 V
RATED VOLTAGE	12 V			24 V	12 V			24 V
SOUND PRESSURE *	105 dBA MIN. @ 30 cm	100 dBA MIN. @ 30 cm	105/100 dBA MIN. @ 30 cm	100 dBA MIN. @ 30 cm	105 dBA MIN. @ 30 cm	100 dBA MIN. @ 30 cm	105/100 dBA MIN. @ 30 cm	100 dBA MIN. @ 30 cm
CURRENT CONSUMPTION *	35 mA MAX.	20 mA MAX.	35 mA MAX.	20 mA MAX.	35 mA MAX.	20 mA MAX.	35 mA MAX.	20 mA MAX.
tone	CONTINUOUS	PULSE	DUAL	CONTINUOUS	CONTINUOUS	PULSE	DUAL	CONTINUOUS
CONNECTION STYLE	PANEL MOUNT WITH PINS				PANEL MOUNT WITH LEADWIRES			
OPERATING TEMPERATURE	-20° to +60° C							

\* VALUES AT OPERATING VOLTAGE

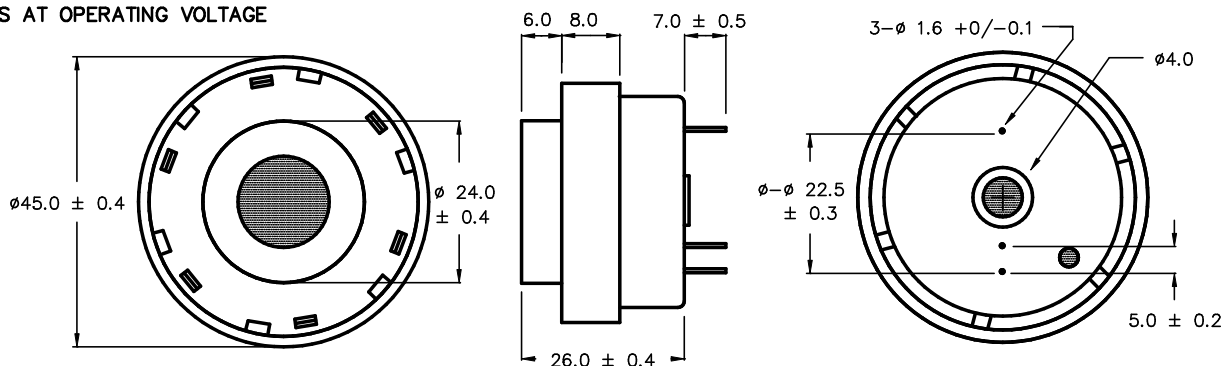

COLOR : WHITE

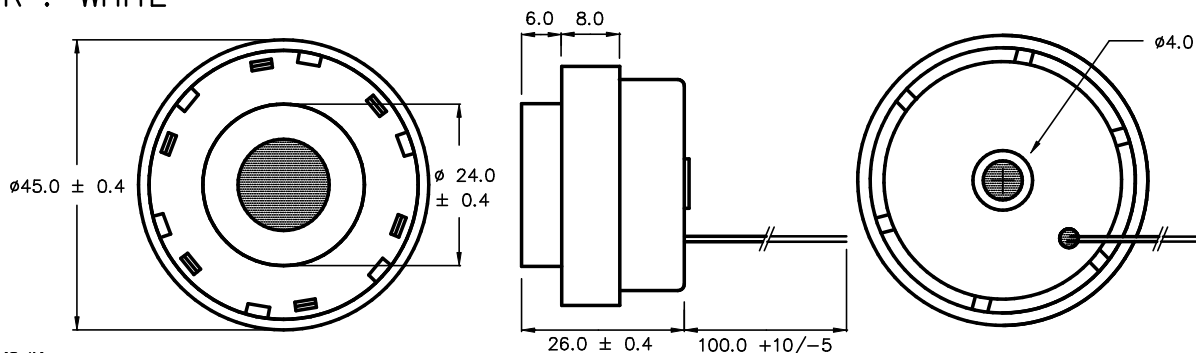

ALL DIMENSIONS IN mm

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTIFICATION / MODELS SHOWN SUBJECT TO LIMITED WARRANTY

SALES OFFICE (516)-767-6644

CORPORATE OFFICE

P.O. Box 575, Scotch Plains, NJ. 07076

Phone: (908)-322-2977 Fax: (908)-322-2358

E-mail: [info@monacocomponents.com](mailto:info@monacocomponents.com)

[www.monacocomponents.com](http://www.monacocomponents.com)