

MONACO COMPONENTS, INC.


EXTERNAL DRIVE STYLE FLANGE WITH LEADWIRERS

**5000
series**

- Lightweight.
- Rich sound output.
- Low current drain.

MODEL	MPB-5302	MPF-5304	MPF-5306
RESONANT FREQUENCY	2500 Hz	1300 Hz	3500 Hz
OPERATING VOLTAGE	30 V _{p-p} MAX.	40 V _{p-p} MAX.	
RATED VOLTAGE	10 V _{p-p} SQUAREWAVE	12 V _{p-p} SQUAREWAVE	3 V _{p-p} SQUAREWAVE
CAPACITANCE *	25000 ± 30% pF	45000 ± 30% pF @ 120 Hz	20000 ± 30% pF @ 120 Hz
DRIVE CIRCUIT	EXTERNAL		
SOUND PRESSURE *	85 dB MIN. @ 10 cm	75 dBA MIN.	
CURRENT CONSUMPTION *	10 mA MAX.	3.5 mA MAX.	2.0 mA MAX.
tone	DEPENDENT ON DRIVE CIRCUIT USED		
CONNECTION STYLE	FLANGE / LEADS		
OPERATING TEMPERATURE	-20° to +60° C		

* VALUES AT RATED VOLTAGE & RESONANT FREQUENCY

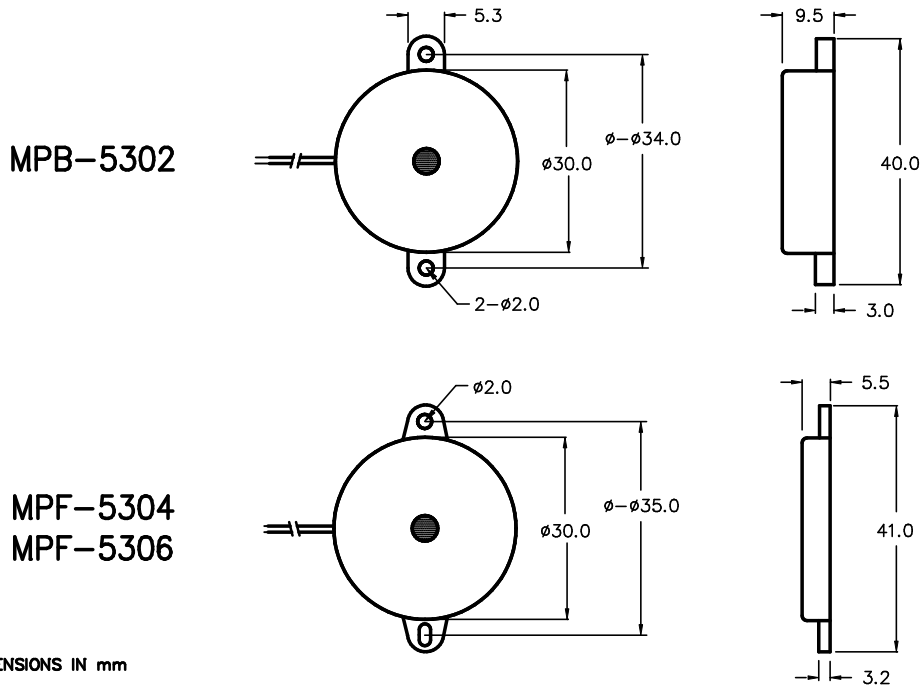

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTIFICATION / MODELS SHOWN SUBJECT TO LIMITED WARRANTY

SALES OFFICE (516)-767-6644
CORPORATE OFFICE
 P.O. Box 575, Scotch Plains, NJ. 07076
 Phone: (908)-322-2977 Fax: (908)-322-2358
 E-mail: info@monacocomponents.com
 www.monacocomponents.com