

MONACO COMPONENTS, INC.

EXTERNAL DRIVE STYLE FLANGE WITH LEADWIRERS


**5000
series**

- Lightweight.
- Rich sound output.
- Low current drain.

MODEL	MPF-5400	MPF-5406
RESONANT FREQUENCY	1000 Hz	1000 Hz
OPERATING VOLTAGE	40 V _{p-p} MAX.	30 V _{p-p} MAX.
RATED VOLTAGE	12 V _{p-p} SQUAREWAVE	3 V _{rms} SINEWAVE
CAPACITANCE *	66000 ± 30% pF @ 120 Hz	80000 ± 30% pF @ 1000 Hz
DRIVE CIRCUIT	EXTERNAL	
SOUND PRESSURE *	80 dBA MIN. @ 30 cm	65 dBA MIN. @ 10 cm
CURRENT CONSUMPTION *	4.0 mA MAX.	1.5 mA MAX.
tone	DEPENDENT ON DRIVE CIRCUIT USED	
CONNECTION STYLE	FLANGE / LEADS	
OPERATING TEMPERATURE	-20° to +60° C	-20° to +70° C


* VALUES AT RATED VOLTAGE & RESONANT FREQUENCY

MPF-5400

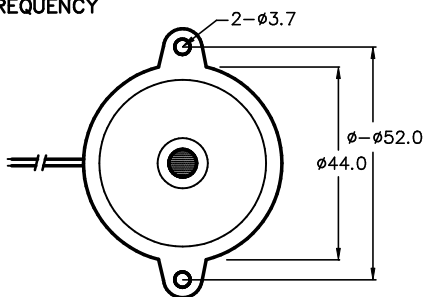

MPF-5406

STAINLESS STEEL SUBSTRATE

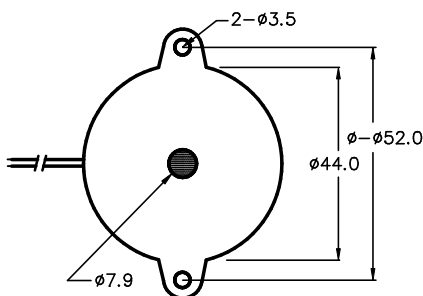

ALL DIMENSIONS IN mm

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTIFICATION / MODELS SHOWN SUBJECT TO LIMITED WARRANTY

SALES OFFICE (516)-767-6644

CORPORATE OFFICE

P.O. Box 575, Scotch Plains, NJ. 07076

Phone: (908)-322-2977 Fax: (908)-322-2358

E-mail: info@monacocomponents.com

www.monacocomponents.com