

MONACO COMPONENTS, INC.

BUILT-IN DRIVE STYLE ELECTRO-MAGNETIC


**8000
series**

- Sealed design for soldering and washing.
- Compact size, rich sound output.
- Wide range of operating voltages.

MODEL	MMF-8108	MMF-8104	MMF-8106
FREQUENCY *	2300 Hz \pm 400 Hz	2300 Hz \pm 300 Hz	
DRIVING CIRCUIT	BUILT IN		
OPERATING VOLTAGE	1.3 - 2 V	4 - 8 V	8 - 15 V
RATED VOLTAGE	1.5 V	6 V	12 V
SOUND PRESSURE *	75 dBA MIN. @ 10 cm	85 dBA MIN. @ 10 cm	
CURRENT CONSUMPTION *	20 mA MAX.	30 mA MAX.	
tone	CONTINUOUS		
CONNECTION STYLE	PCB MOUNT (PINS)		
OPERATING TEMPERATURE	-10° to +50° C	-25° to +80° C	

* VALUES AT RATED VOLTAGE

MMF-8108
MMF-8104
MMF-8106

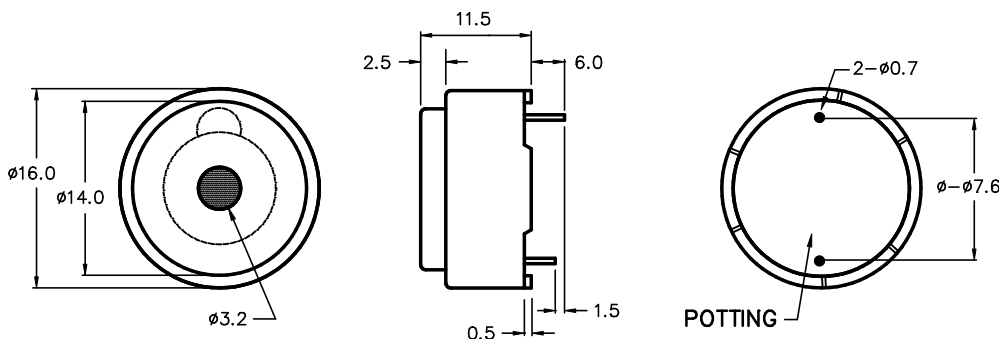

NORYL SEI-GFN2 HOUSING MATERIAL
SEALED - SOLDERABLE AND WASHABLE

ALL DIMENSIONS IN mm

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTIFICATION / MODELS SHOWN SUBJECT TO LIMITED WARRANTY

SALES OFFICE (516)-767-6644

CORPORATE OFFICE

P.O. Box 575, Scotch Plains, NJ. 07076

Phone: (908)-322-2977 Fax: (908)-322-2358

E-mail: info@monacocomponents.com

www.monacocomponents.com